

## OSA 5401

### SFP-based PTP grandmaster, boundary and slave clock and NTP server

From 4G and 5G mobile networks, through power utilities to modern broadcast services, mission-critical applications demand ultra-compact and cost-effective synchronization solutions for deployment deep in the network with minimal footprint and power consumption. Our OSA 5401 SyncPlug™ enables precise synchronization in the most space-restrictive environments. Now there's a simple way to upgrade legacy systems with IEEE 1588v2 Precision Time Protocol (PTP).

The OSA 5401 SyncPlug™ small-form factor pluggable (SFP) is a powerful and versatile time server with a built-in GNSS receiver and the smallest footprint and most compact design on the market. It enables accurate phase and frequency synchronization using PTP, Sync-E and NTP at the network edge with zero-adding footprint. Its small form factor and rich feature set enable a versatile range of deployment options for enhanced synchronization network performance.



### Your benefits

✓ **Syncjack™ technology**

Highly accurate timing delivery and assurance with smallest footprint on the market

✓ **Fully-featured freq. and phase enabler**

Built-in GNSS receiver enabling PRTC and IEEE 1588v2 grandmaster (GM), boundary (BC), slave clock (SC) and NTP server functionality

✓ **Compatible**

Compliant with SFP multi-source agreement (MSA) – no need for additional space and power

✓ **Advanced jamming and spoofing detection**

Advanced jamming and spoofing detection on device and NMS levels

✓ **Extended holdover performance**

Multiple fallback options - high-end stratum 3E oscillator, SyncE and PTP can be used in the event of GNSS outage

✓ **Customizable**

OEM product customization option for vendor branding

## High-level specifications

### OSA 5401 SyncPlug™

- Small form-factor pluggable SFP with GNSS receiver
- Integrated GM, BC, SC
- Integrated NTP server
- Robust design
- Add-on plugs into hosting device

### SFP form factor

- Power consumption <1.5W
- Extended operating temperature range
- MSA compliant
- Zero footprint

### PTP functionalities

- Configurable as GM, BC, slave clock and APTS
- GM supported profiles:
  - IEEE 1588 2008 L3/L2,
  - ITU-T 8265.1 / 8275.1 / 8275.2
- Power, broadcast
- PTP over L2 and over IPv4/IPv6 supported simultaneously

### Timing accuracy

- +/-100nsec from UTC
- G.8272/G.8273.1 compliant PRTC
- G.811 compliant PRC
- G.8262/G.8264 Sync-E

### Management

- In-band management over IPv4 and IPv6
- Remote and secured CLI-Telnet and SSH
- Separate management and PTP IP address
- Ensemble management and control





### Built-in GNSS receiver

- 72-channel multi-GNSS
- Enhanced timing features
- Advanced jamming and spoofing detection
- Dual-frequency GNSS
- GPS, GLONASS, BeiDou

## Applications in your network

### Ultra-compact and cost-effective synchronization

- Radio access network synchronization including 3G, 4G, 5G (femtocells and small cells as well as macro cells)
- Cable networks (DOCSIS 3.1) and PON synchronization
- GNSS receiver upgrade for small cells
- Modernized power utility and media broadcast networks
- Time-as-a-service into data center, financial, health and media networks
- Upgrade of aggregation switches for delivering precise frequency and phase sync via PTP and SyncE
- PTP boundary and slave clock enabler to existing network elements such as switches and microwaves

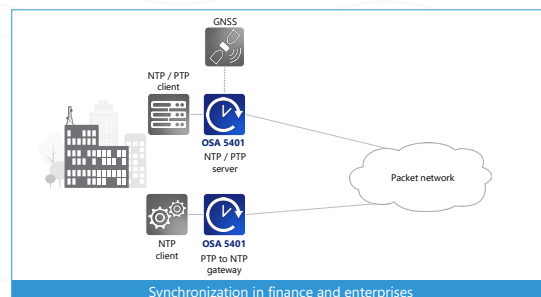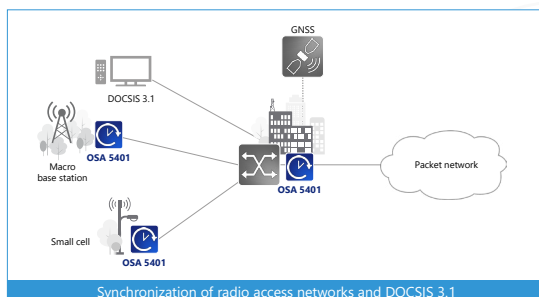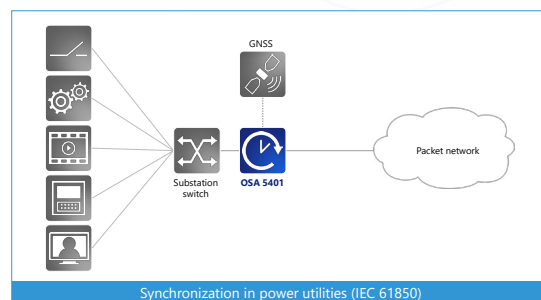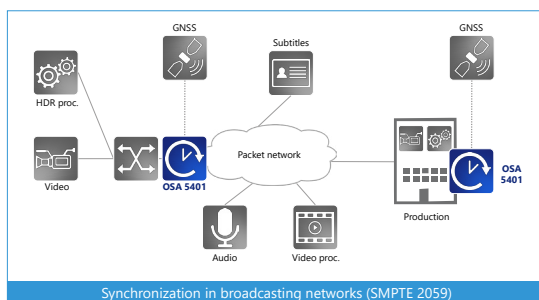

For more information please visit us at [www.adva.com](http://www.adva.com)  
© 11 / 2019 ADVA Optical Networking. All rights reserved.

Product specifications are subject to change without notice or obligation.

**OSCILLOQUARTZ**  
An ADVA Company

## Main applications

- 1588v2 PTP grandmaster, boundary and slave clocks
- PTP to Sync-E and Sync-E to PTP conversion
- GNSS receiver operating as PRTC and PRC
- NTP server

## PTP master modes of operation

- PTP Telecom profiles:
  - ITU-T G.8265.1 & Telecom2008 frequency delivery profiles
  - ITU-T G.8275.2 time/phase delivery profile
  - ITU-T G.8275.1 time/phase delivery profile (full timing support) also used for DOCSIS 3.1
- PTP enterprise profile (mixed IP multicast and unicast)
- PTP power and utility profiles:
  - IEC/IEEE 61850-9-3
  - IEEE C37.238-2011
  - IEEE C37.238-2017
- PTP Broadcast profiles:
  - SMPTE ST 2059-2
  - AES67 Media Profile
- Grandmaster simultaneous support for multiple profiles

## PTP slave modes of operation

- PTP Telecom profiles:
  - ITU-T G.8265.1 & Telecom2008 frequency delivery profiles
  - ITU-T G.8275.2 time/phase delivery profile
  - ITU-T G.8275.1 time/phase delivery profile (full timing support)
- IEEE1588v2 default PTP profiles over L3 (Annex D) and L2 (Annex F)
- PTP enterprise profile (Mixed IP multicast and unicast)
- Designed to support power and broadcast profiles (HW ready)

## PTP features

- Up to 64 unicast slaves at 128pps
- Full featured IEEE 1588-2008 PTP grandmaster, boundary and slave clocks
- Assisted partial timing support (APTS) – PTP input to backup GNSS outage over network with partial/no timing support
- 1-step clock
- Dedicated or common IP PTP interface
- VLAN (IEEE 802.1Q) or untagged
- Sync-E input to PTP output (frequency) conversion
- Conversion between PTP profiles
- Maintain PTP slaves list
- Fixed asymmetry compensation

## Ethernet interface

- SFP or combo SFP/SFP+ 1000Base-X (MSA compliant)

## 1PPS/CLK out

- User configurable output: 1PPS/10MHz/2.048MHz
- RP-MMCX connector (50 ohms)

## Synchronous Ethernet (Sync-E)

- Compliant to the relevant sections of ITU-T G.8261 / G.8262 / G.8264
- Supported on ingress and egress
- G.811 compliant Sync-E primary reference clock (PRC) when locked to GNSS
- Ethernet synchronization message channel (ESMC)
- Sync-E input for time holdover during GNSS outage

## NTP Server

- Smallest NTP server formfactor
- Security-hardened NTP server with Hardware-based responder
- Stratum 1 NTP server when locked to GNSS
- NTP v1, v2, v3, v4 and SNTP over IPv4 /IPv6
- Hardware-based timestamping
- Within +/-100nsec from UTC
- Hardware base DoS protection using NTP responder
- Up to 500,000 transactions per second
- Support PTP and NTP on same port
- PTP to NTP translation
- PTP backup in case of GNSS outage
- Stationary or moving platforms

## GNSS receiver

- 72-channel multi-GNSS engine
- Concurrent GNSS (dual frequency)
- Supports single satellite timing modes
  - Survey fixed location
  - Configurable fixed location
- Supports navigation mode
- Configurable satellites SNR and elevation masks
- Advanced spoofing and jamming detection on device level
- AI based spoofing and jamming detection based on NMS GNSS assurance
- GPS / QZSS L1 C / A and GLONASS L10F, BeiDou B1
- Supported modes: GPS / GLONASS / BeiDou / GPS+ GLONASS / GPS+ BeiDou, GPS+SBAS (QZSS, WAAS, EGNOS, MSAS)
- User configurable antenna cable delay compensation
- Voltage to antenna +3.3VDC
- Antenna connector SMA-F (50 ohms)

## Internal oscillator

- OCXO Stratum 3E (20-55°C,  $\Delta T = \pm 20^\circ\text{C}$ )

## Frequency accuracy

- G.811 compliant PRC while locked to GNSS

## Time and phase accuracy

- G.8272 / G.8273.1 compliant PRTC ( $\pm 100$  nsec from UTC, MTIE  $< 100$  nsec) while locked to GNSS
- During GNSS outage: time holdover using a G.811 PRC / G.8272 PRTC Sync-E input
  - Traceable to G.811 PRC: TimeError  $< \text{UTC} \pm 1 \mu\text{sec}$  for 24 hrs
  - Traceable to G.8272 PRTC: TimeError  $< \text{UTC} \pm 1 \mu\text{sec}$  for 72 hrs

## Indications

- GNSS operation and general fault indication status LED

## Syncjack™ monitoring and assurance tools

- Clock Accuracy for up to two clock probes – computing TE and TIE of physical clocks
- Calculation TE/TIE between physical source and reference signals
- Programmable source and reference signals including SyncE, GNSS, PTP recovered clock.
- TE/TIE raw data collection and export to server
- Clock Analysis for up to two PTP clock probes – packet TE/TIE
- Calculation of packet TE/TIE between physical reference signal and timestamps within the PTP packets
- Programmable reference signals including SyncE and GNSS
- TE/TIE raw data collection and export to server

## Management and security

- In-band management (over PTP / Sync-E port)
- Remote CLI – Telnet & SSH (Secure Shell)
- Separate MGMT IP & PTP address
- VLAN and untagged
- System software download via TFTP & SCP (secure copy)
- Enable to disable each of the protocol via CLI
- Alarm log
- Syslog
- Remote authentication via RADIUS
- Remote, secured backup and restore
- Remote, secured SW upgrade
- Low touch provisioning using configuration file
- Multi-level user access
- Access control list (ACL)
- Full management using SNMP v2 / v3 including authentication and encryption
- Alarms, inventory and traps reporting to NMS
- Managed by ADVA Ensemble Controller and Ensemble Sync Director, including GNSS assurance toolkit

## Regulatory and standards compliance

- ITU-T G.8261, G.8262, G.8264
- ITU-T G.8272, G.811
- ITU-T G.8265.1, G.8275.1, G.8275.2
- IEEE 1588v2 (PTP)
- ETSI EN 300 386 V1.6.1
- EN 55024
- EN 55022 Class-B
- AS/NZS CISPR 22
- FCC CFR 47 Part 15 Subpart B
- ANSI C63.4 Class-B
- IEC/EN 61000-3-2
- IEC/EN 61000-3-3
- IEC/EN 61000-4-2 (ESD):  $\pm 15$  kV /  $\pm 8$  kV (air/contact)
- IEC/EN 61000-4-3 (RI)
- IEC/EN 61000-4-4 (EFT): 1 kV / 50 A (5/50 ns)
- IEC/EN 61000-4-5 (Surge): 4kV (10/700  $\mu\text{s}$ )
- IEC/EN 61000-4-6 (CI)
- EN 60950-1: +A11, +A12, +2 (SAFETY)
- RoHS compliance

## Environmental

- Operating temperature:  $-40$  to  $+80^\circ\text{C}$  /  $-104$  to  $176^\circ\text{F}$
- Storage temperature:  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$  /  $-104$  to  $185^\circ\text{F}$
- Humidity: 5 to 95% (non-condensing)

## Power consumption

- Max power consumption  $< 1.5\text{W}$  ( $T > 20^\circ\text{C}$ )

## Optional accessories

- GNSS (GPS/GLONASS/BeiDou) antenna kits 10/20/60/120/150m (32.8ft/65.6ft/ 196.85ft/ 393.7ft/492.1ft), including indoor and outdoor cables, roof antenna, lightning protector and mounting kit
- Patch window antenna
- 1:2/1:4/1:8 GNSS splitters
- RP-MMCX to BNC adapter cable

**COVERTTEL**  
TELECOMMUNICATIONS GROUP

### Need local support?

Contact: Brad Wilmore  
Email: [brad@covertel.com.au](mailto:brad@covertel.com.au)  
Mobile: +61 433 115 101 Office: 03 9381 7888

**Get quick assistance without international delays.**